

Gravimetric Resin Blenders



Brampton Engineering


**Worldwide Headquarters
Brampton Engineering Inc.**
8031 Dixie Road
Brampton, Ontario L6T 3V1
CANADA
Tel: (905) 793-3000
Fax: (905) 793-1753
URL: www.be-ca.com
E-mail: salesadmin@be-ca.com

**US Office
Brampton Engineering Inc.**
Tel: (1-800-867-9997
E-mail: sales@be-usa.com

BE China
Rm 1707 Zhongyinhuilong Bldg.
8 Suhua Road
Industrial Park Suzhou,
215021 P.R. China
Tel: 86-512-62959188
Fax: 86-512-6522-6627
E-mail: be@be-china.cn
For the latest news from BE visit:
www.be-ca.com

Quality: Brampton Engineering Inc. worldwide headquarters continues to meet the ISO 9001 standard which covers design, manufacture, assembly, installation and service of our products.

GBI-03-2007-E-digital

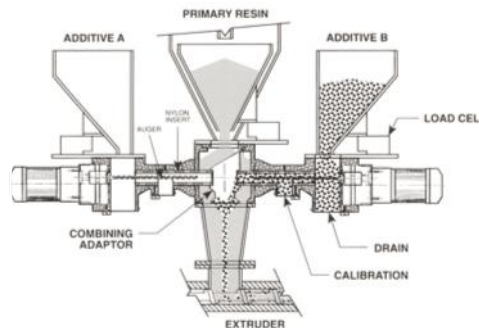

BE gravimetric blending systems are available as two-component through seven-component configurations.

- total throughput rated to 1600pph (725kg/hr)
- additive metering rates from 1pph to 500pph (0.5kg/hr to 225kg/hr)
- extruder throughput rate control for single layer lines and layer ratio control for coextrusion lines
- inventory information.

BE Blending Systems Standard Features

- interchangeable augers and sleeves for rate optimization
- 2, 3, 4, 5, 6, or 7 components
- easy clean out
- unique combining adaptor ensures complete dispersion without mechanical agitation
- purge/dump chute mounted on extruder feed throat.

Options

- magnetic filtration of resin prior to entering extruder.